


ORINATOIO ELETTRONICO A BARRIERA

INFRARED WALK-THROUGH URINAL

box n. 1

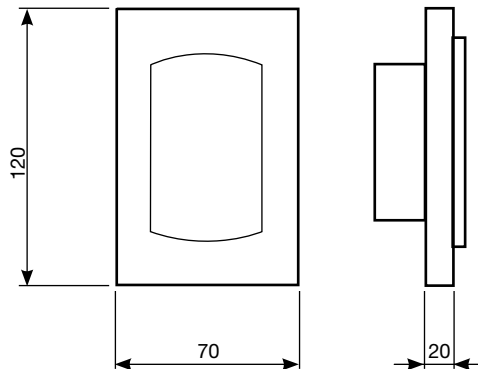


- Distanza 50-70 cm. dagli apparecchi (vedi disegno) – erogazione per circa 10 sec. - Protezione IP65

Distance 50-70cm. from the appliances (see drawing) - water supply for about 10 sec. IP65 protection


Trasformatore
in scatola stagna
Transformer in
watertight box
230V - 12V

Dispositivo
elettronico
Infrared
device

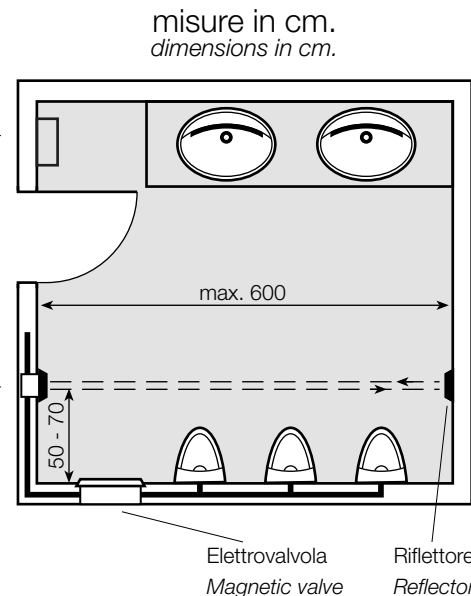

- L'impianto elettrico deve essere eseguito da personale abilitato
The electrical system must be performed by qualified personal

ORINATOIO ELETTRONICO A BARRIERA INFRARED WALK-THROUGH URINAL

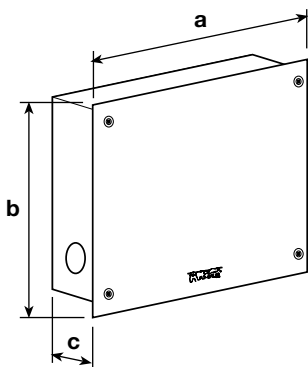

CODICE	mm a	mm b	mm c	NOTE	€
E2077/3	240	190	80	Orinatoio a barriera da incasso elettronico con riflettore – alimentazione a rete 12Vdc – portata litri/minuto 70 a 3 bar – incorporato rubinetto Ø 1/2" con filtro inox per eventuale manutenzione 2 scatole per il montaggio: ■ scatola n. 1 da incasso prof. 80 mm. con premontati rubinetto di chiusura, filtro inox ed elettrovalvola con chiusura progressiva ■ scatola n. 2 dispositivo elettronico mm. 120x70x20 e riflettore Ø 80. Infrared walk-through built-in urinal with reflector - 12Vdc mains power supply - flow rate 70 liters/minute at 3 bar - built-in tap Ø1/2" with stainless steel filter for any maintenance 2 boxes for assembly: ■ box n. 1 built-in prof. 80 mm. with pre-assembled faucet closure, stainless steel filter and solenoid valve with progressive closure ■ box n. 2 electronic device 120x70x20 mm and reflector Ø 80.	